


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2016
© COPYRIGHT 2016 BY TE CONNECTIVITY ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER E.O. P19446	15JAN2007	-	RDR
	B	REVISED PER E.O. P20338	5NOV2009	-	RDR
	C	REVISED PER PCN-24-222744	18SEP2024	GB	CB
	C1	REVISED PER PCN-26-276648	13APR2026	CO	EC

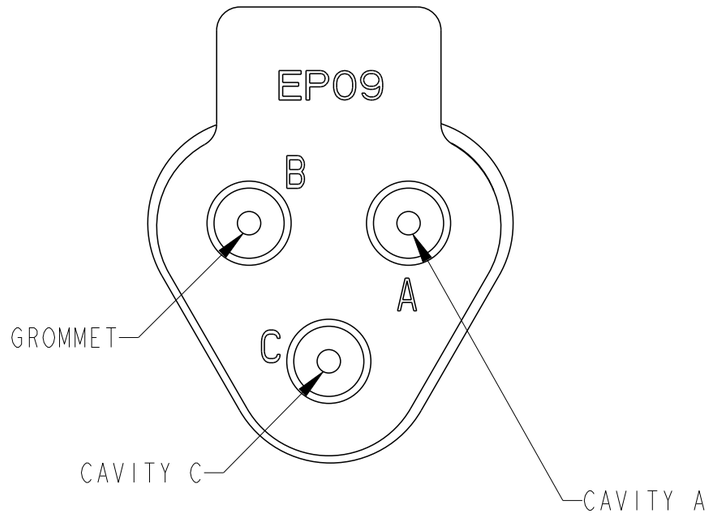


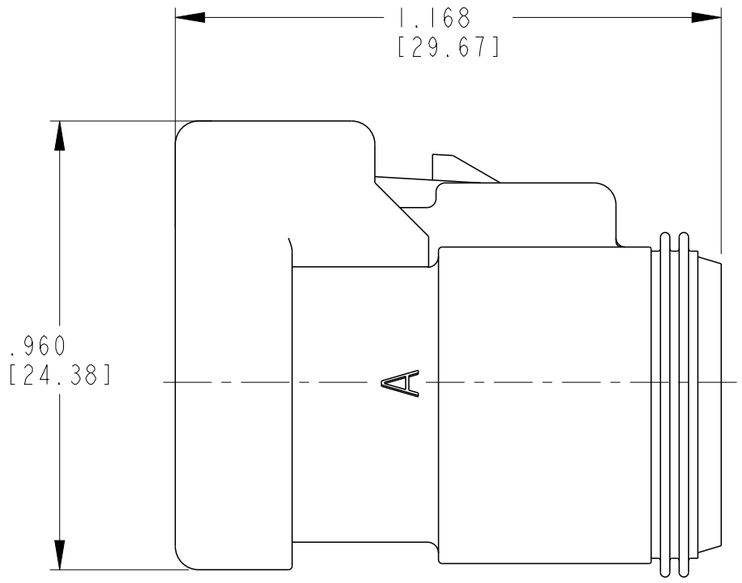

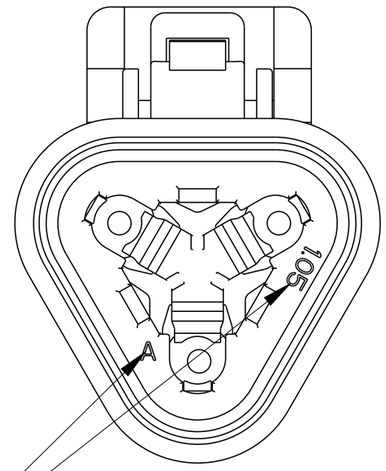

DATE CODE : MONTH REPRESENTED BY SEQUENTIAL ALPHA CHARACTERS.
EX. A = JANUARY
YEAR IS REPRESENTED BY LAST NUMERICAL DIGIT
EX. 0 = 2020

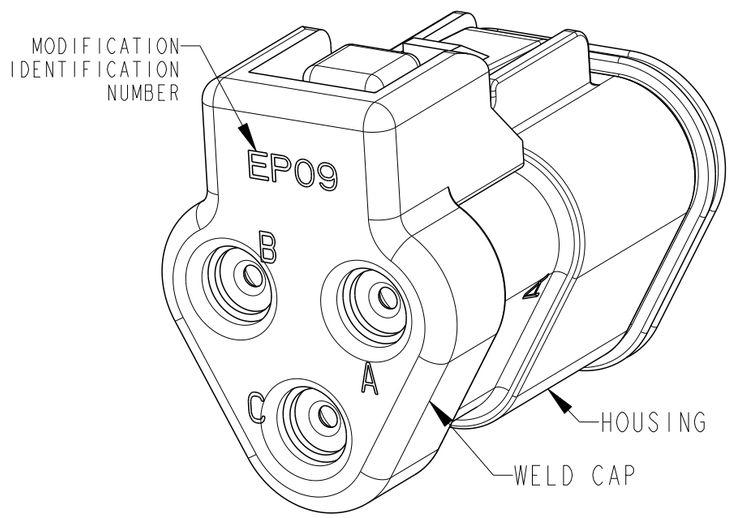

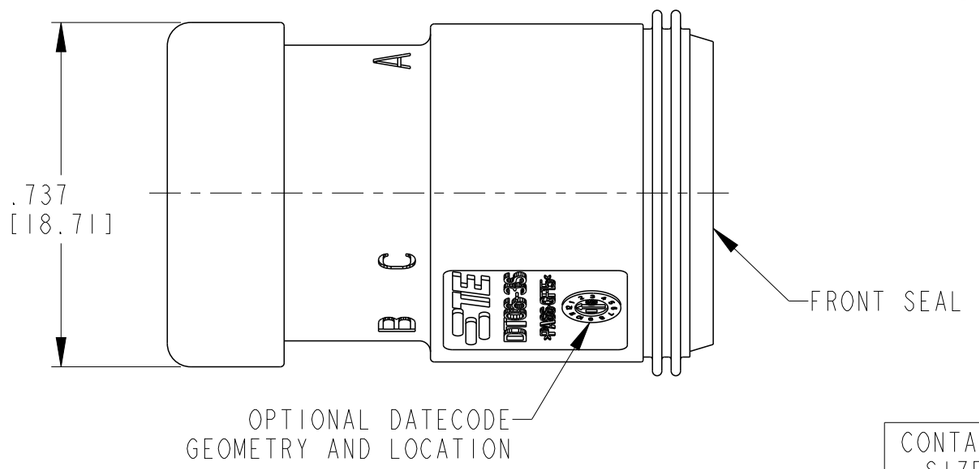

TE INTERNAL PN	DEUTSCH PN
DT06-3S-EP09	DT06-3S-EP09

CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	WIRE RANGE [mm²] REF. ONLY ⚠1
16	.088 [2.23]	.145 [3.68]	14-20 AWG [2.5-0.5]

3 MATERIAL: HOUSING: PA66 GF15 (BLACK)
CAP: PA66 GF15 (BLACK)
FRONT SEAL: VMQ (RED-ORANGE)
GROMMET: VMQ (RED-ORANGE)

2. THIS PLUG MATES WITH DT04-3P-XXXX RECEPTACLE.
(XXXX = ALL MODIFICATIONS)
CONSULT FACTORY FOR MODIFICATION

⚠1 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWINGS 0425-015-000 AND 0425-017-0000

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: in [mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [0.64]
4 PLC ±
ANGLES ±1°

MATERIAL ⚠3

FINISH

DWN S.THEIS 24NOV1998
CHK B.BYFORD 05NOV2009
APVD S.BEARD 04NOV2009
PRODUCT SPEC 108-151009
APPLICATION SPEC 114-151009
WEIGHT 7.10g

TE Connectivity

NAME 3 WAY PLUG
LATCH PROTECTOR CAP
DT SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-DT06-3S-EP09	

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV C1