
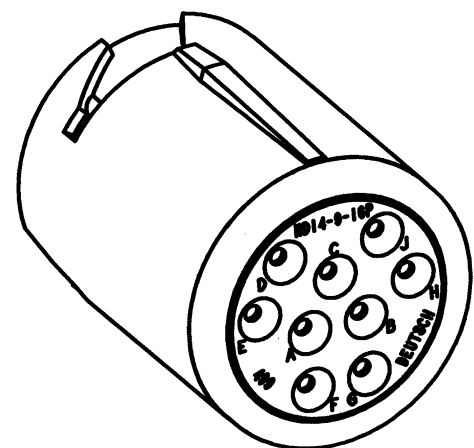
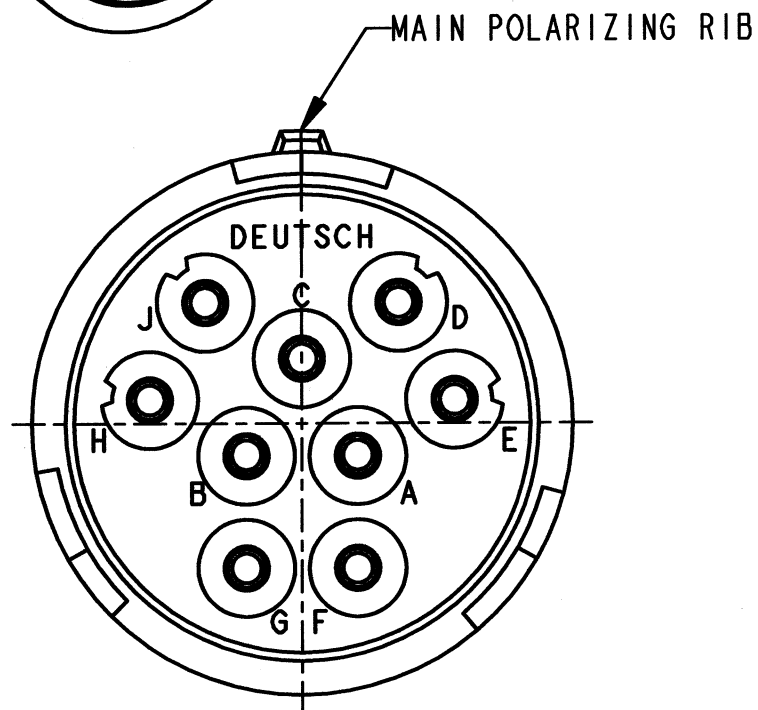
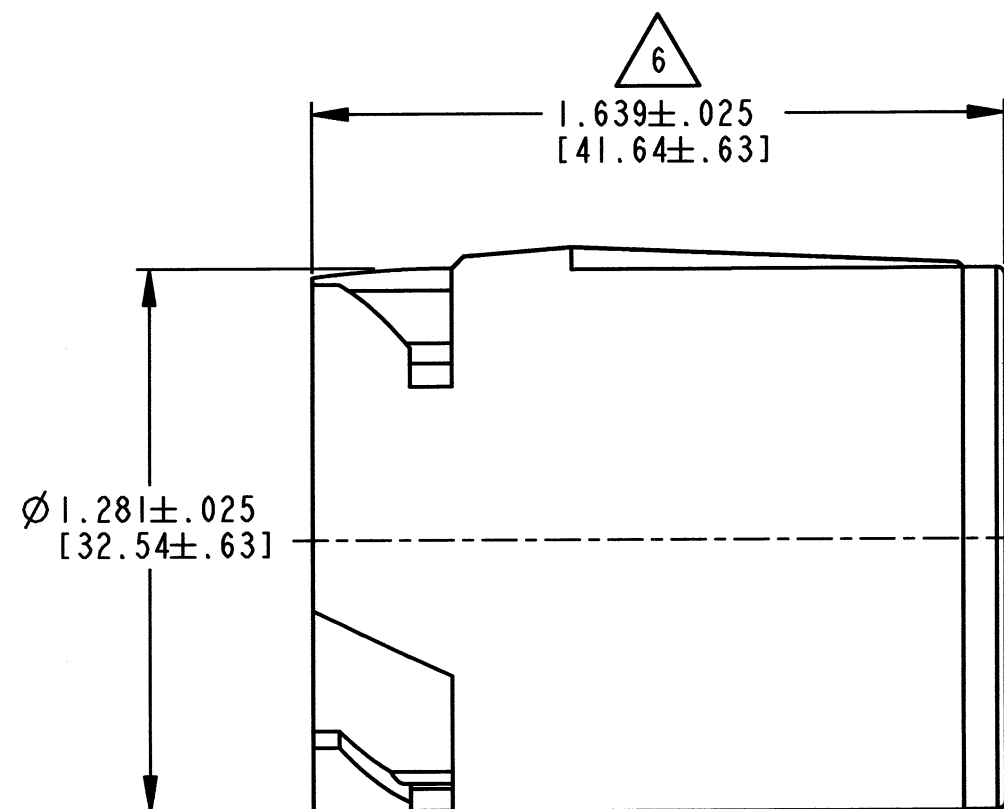


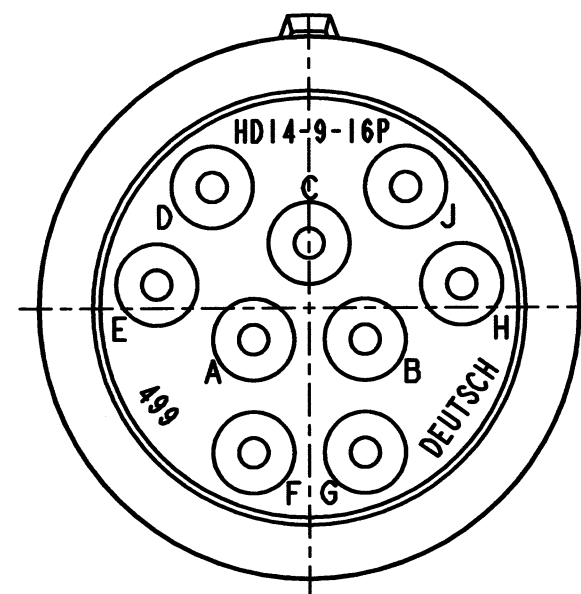

REV
D

HD14-9-16P

REVISIONS

SYM	DESCRIPTION	DATE	APPROVED
A	REVISION (1) PER E.O. A3379	09/05/85	J.R.A.
B	REVISION PER E.O. A5914	04/17/87	J.R.A.
C	REVISED & REDRAWN PER E.O. P16261	09/17/99	R.D.R.
D	REVISED PER E.O. P20769	1-21-11	KDR

4. FOR "PERFORMANCE AND APPLICATION CHARACTERISTICS OF SOLID/STAMPED AND FORMED CONTACTS AND WIRES," SEE ENVELOPE DRAWING 0425-015-0000. THIS RECEPTACLE USES PIN CONTACTS ONLY.
3. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. THIS CONNECTOR SERIES WILL ACCOMMODATE THE FOLLOWING WIRE INSULATION DIAMETERS:

CONTACT SIZE	MINIMUM O.D.	MAXIMUM O.D.
16	.100 [2.54]	.150 [3.81]

1. CONSULT FACTORY FOR ELECTRICAL AND MATERIAL SPECIFICATIONS.

NOTES:

7. MATERIAL: SHELL: PLASTIC, SEAL: RUBBER.

6. OVERALL DIMENSION DOES NOT INCLUDE RUBBER GROMMET.

5. THIS RECEPTACLE MATES WITH HD16-9-16S*-**** PLUG (* = SEAL TYPE, **** = ALL MODIFICATIONS).

SIGNATURE & DATE	
DR	J. HAYNES 08/31/99
CHK	Eric Byrd 1/21/2011
PE	Brantley 1/14/11
APPD	S. Beaud 1/14/11
SCALE	NONE WT

RECEPTACLE CONNECTOR
INLINE
HD10 SERIES
ARR. 9-16
COLOR: GREY

ENVELOPE

EP	MATL. CODE
 3850 INDUSTRIAL AVE. HEMET, CA 92545	
DEUTSCH INDUSTRIAL	
B	HD14-9-16P
DWG SIZE	CODE 11139 SHEET OF